

Blue Lagoon Inox UV-C





Operation

Thanks to the Blue Lagoon Inox UV-C, your swimming pool water will be disinfected efficiently and safely and the quality of your water will remain excellent. The UV-C radiation inactivates bacteria, viruses and other microorganisms and stops them from multiplying. This device is able to reduce chlorine concentration up to 50%!



Advantages of the Blue Lagoon Inox UV-C

- Up to 35% more UV-C yield as a result of reflection by the stainless steel reactor
- Philips UV-C lamp
- A flow switch will turn off the lamp at insufficient water flow
- Integrated adjustable timer for the UV-C lamp
- Digital indication when the lamp needs replacing
- Complete 316L stainless steel housing
- Easy installation and maintenance
- Made in the Netherlands

Blue Lagoon INOX UV-C Technical



	75.00	120.00
	75 W	130 W
Art. number	BP02752	BP02132
Туре	75 W	130 W
EAN	8714404038669	8714404038676
Rec. flow for 30 mJ/cm ²	18 m³/h	22 m³/h
Max. pressure	5 bar	5 bar
Max. flow	23 m³/h	23 m³/h
Diameter unit Ø	114 mm	114 mm
Length unit	100 cm	100 cm
Diameter in-outlet Ø	2" Male thr.	2" Male thr.
Housing material	316 L	316 L
Electronic ballast	230 V AC 50 Hz	230 V AC 50 Hz
Lamp power	75 W	130 W
Lamp	Philips TUV 36T5 HO 4P-SE (75 W)	Philips TUV 130 W 4P-SE Amalgam
Lifespan lamp	9.000 hours	12.000 hours
Timer	\checkmark	\checkmark
Flow switch	\checkmark	\checkmark
Replace lamp alert	\checkmark	\checkmark
Weight	7,2 Kg	7,3 Kg
Quantity full pallet	21 pcs	21 pcs




Spare parts

A	E800902P	Lamp Philips TUV 36T5 75 W HO 4P-SE Base C AM
	E800904	Lamp Philips TUV XPT 130 W 4P-SE Amalgam Base E
В	QG015	Quartz Glass VSC 933 x 25 mm 40/75/80 W AM
	QG012	Quartz Glass VSC 920 x 30 mm 130 / 140 W AM
С	E800912	Set (3pcs) O-ring for quartz glass
D	EP075010.1	Electrics for BL UV-C INOX 75 W incl. flow switch
	EP130007	Electrics for BL UV-C INOX 130 W amalgam incl. flow switch
Е	B212002	Housing for Blue Lagoon Inox UV-C
М	B290020	Reduction piece 63/63 mm 3/4" male threaded for flow switch
	B290021	Reduction piece 60.3/60.3 mm 3/4" USA/UK male threaded for flow switch

Optional

	B290177	Tapping saddle 50 x 3/4" male thread for flow switch
V	B290170	Tapping saddle 63 x 3/4" male thread for flow switch
	B290176	Tapping saddle 75 x 3/4" male thread for flow switch
	B290176	Tapping saddle 75 x 3/4" male thread for flow switch



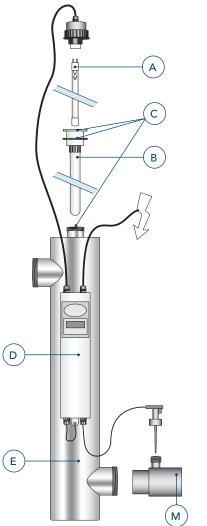



Nieuwe Eerdsebaan 26
5482 VS Schijndel The Netherlands

• Tel. +31 88 222 1999 • info@vgebv.nl www.bluelagoonuvc.com