

Blue Lagoon Inox UV-C





Operation

Thanks to the Blue Lagoon Inox UV-C, your swimming pool water will be disinfected efficiently and safely and the quality of your water will remain excellent. The UV-C radiation inactivates bacteria, viruses and other microorganisms and stops them from multiplying. This device is able to reduce chlorine concentration up to 50%!



Advantages of the Blue Lagoon Inox UV-C

- Up to 35% more UV-C yield as a result of reflection by the stainless steel reactor
- Philips UV-C lamp
- A flow switch will turn off the lamp at insufficient water flow
- Integrated adjustable timer for the UV-C lamp
- Digital indication when the lamp needs replacing
- Complete 316L stainless steel housing
- Easy installation and maintenance
- Made in the Netherlands

Blue Lagoon INOX UV-C Technical



	75 W	130 W Amalgam
Art. number	BP02752	BP02132
Туре	75 W	130 W
EAN	8714404038669	8714404038676
Rec. flow for 30 mJ/cm ²	18 m³/h	22 m³/h
Max. pressure	5 bar	5 bar
Max. flow	23 m³/h	23 m³/h
Diameter unit Ø	114 mm	114 mm
Length unit	100 cm	100 cm
Diameter in-outlet Ø	2" Male thr.	2" Male thr.
Housing material	316 L	316 L
Electronic ballast	230 V AC 50 Hz	230 V AC 50 Hz
Lamp power	75 W	130 W
Lamp	Philips TUV 36T5 HO 4P-SE (75 W)	Philips TUV 130 W 4P-SE Amalgam
Lifespan lamp	9.000 hours	12.000 hours
Timer		\checkmark
Flow switch		\checkmark
Replace lamp alert		\checkmark
Weight	7,2 Kg	7,3 Kg
Quantity full pallet	27 pcs	27 pcs




Spare parts

A	E800902PAM	Lamp Philips TUV 36T5 75W HO 4P-SE Base C AM Packed	
	E800904AM	Lamp Philips TUV XPT 130W 4P-SE Amalgam Base E AM Packed	
В	QG015	Quartz Glass VSC 933 x 25 mm 40/75/80 W AM	
	QG012	Quartz Glass VSC 920 x 30 mm 130 / 140 W AM	
С	E800912	Set (3pcs) O-ring for quartz glass	
D	EP075010.1	Electrics for BL UV-C INOX 75 W incl. flow switch	
	EP130007	Electrics for BL UV-C INOX 130 W Amalgam incl. flow switch	
Е	B212002	Housing for Blue Lagoon Inox UV-C	
М	B290020	Reduction piece 63/63 mm 3/4" male threaded for flow switch	
	B290021	Reduction piece 60.3/60.3 mm 3/4" USA/UK male threaded for flow switch	

* Optional part

	SP0070	Tapping saddle 50 x 3/4" male thread for flow switch
V	SP0071	Tapping saddle 63 x 3/4" male thread for flow switch
	SP0072	Tapping saddle 75 x 3/4" male thread for flow switch

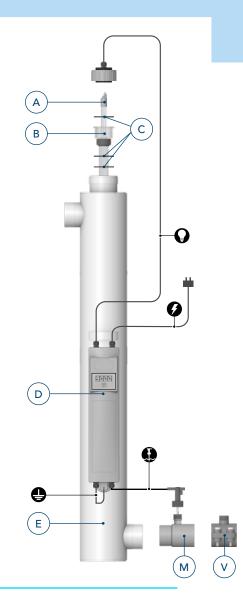

• Tel. +31 88 222 1999 • info@vgebv.nl www.bluelagoonuvc.com